

MERCEDES GLA - 2015 - 2020

SEATS - RECLINED & UPRIGHT

Our ref: H0627- SEREC/SEUP

PACKAGING REQUIREMENTS.

☐ CARGO LINER

- 2 x 410mm of 30mm wide self-adhesive loop fastener
- 6 x REF:113



REF:113

☐ LIFTGATE COVER

- 18 x tabs self-adhesive loop fastener



Image above is the Upright Ski Spilt version prepared for Cargo Liner Extension



Image above is the Reclined Standard version



VERY IMPORTANT PREPARATION

To ensure a good bond, when using the self-adhesive hook & loop fastener to attach the cover to the plastic trim it is most important to remove silicone film from the vehicle trim. Silicone is applied during manufacture and can also be found in many detailing products. It is **highly likely there will be a build-up of silicone**. Before applying any self-adhesive fastener pads, the surface **MUST be thoroughly** cleaned using a silicone remover. (The fasteners cannot be used once they have been in contact with silicone). We recommend Intensive Tar Remover made by AutoGlym. Wipe off thoroughly **any residue with a separate clean dry cloth**.

NOTE: the adhesive takes 24hrs to reach full adhesion – do not touch during.



STEP 1. PREPARATIONS

- Please remove the cargo cover, it may be replaced once the Cargo liner has been installed
- Ensure you set the incline of the seats to suit the seat rake you have ordered.

STEP 2. INSTALLING THE BASE

- Place the Cargo liner into the cargo area with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. (Image A)



STEP 3. INSTALLING THE FRONT

- - **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panel and the seat panel. (Image B)
- Starting with the middle headrest, loop the hook & loop fastener straps around both headrest posts. (Image C). Make sure to hold the front part of the base in position to avoid pulling the Hatchbag too far up.
- Locate the position of the 6 hook fastener welds on the reverse face of the liner front panel. Take the 6 x REF: 113 fastener tabs, fasten them onto the back seat carpet in alignment to these fastener welds. (Image D). The tabs will remain on the seat at all times. When you wish to remove the Cargo liner or fold the seats : carefully peel the liner off the tabs.
- Unlock the rear seat just enough to trap the upper corners behind the plastic molding. (Image E).



REAR PLUS VERSIONS


You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper parts of the rear seats. (Please refer to **REAR PLUS** options on website to see detailed photo)


STEP 4A. INSTALLING THE SIDES

- Place the side panels in position, pushing the Cargo liner pocket into the recess on the left side. (Image F)
- The hook fasteners on the back side of the Cargo liner attach directly to the carpet. (Image G)



STEP 4B. INSTALLING THE BACK

- Attach the two 410mm loop fastener strips onto the plastic edge on either side of the liftgate lock. (Image H).
- Attach the Cargo liner to these fastener strips. 

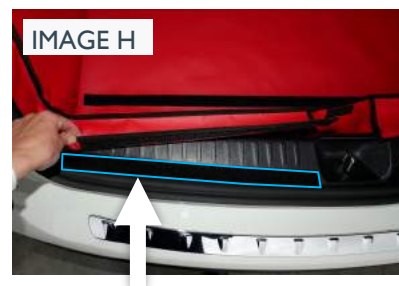

LEFT SIDE RECLINED



RIGHT SIDE RECLINED



LEFT SIDE UPRIGHT



RIGHT SIDE UPRIGHT

OPTIONAL EXTRAS

Please note the following photos are not specific to your vehicle

STEP 5A. LIFTGATE COVER

- Line up the liftgate cover with the liftgate and clean the areas where the self-adhesive fastener tabs will be stuck. (Image 1)
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



STEP 5B. BUMPER FLAP

- Install Cargo liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the Cargo liner.
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.



OPTIONAL EXTRAS page 2

Please note the following photos are not specific to your vehicle

STEP 5C. CARGO LINER EXTENSION

The Cargo Liner Extension provides superior protection to the rear seats when purchased with a REAR PLUS / SPLIT option.

- The Cargo liner Extension is designed to attach to a Rear Plus version liner.
- It provides additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors



STEP 5D. SKI FLAP SPLIT

- Should you wish to utilize the Ski flap: unfasten the liner front panel first and fold back into the cargo area.
- Open the plastic ski flap and fold back onto the back of the rear seat so that it magnetises flush to the seat.
- Reposition the liner's front panel.
- The flap is designed to unfasten and fold back into the cargo area.



The Bumper Flap and the Cargo Liner Extension & the Ski Flap Split cannot be added at a later date.

STEP 5E. FREQUENT USE INSTALLATION KIT

- If you frequently remove/install your Cargo Liner from/to your vehicle please note that the carpet will "fluff" up. We offer an alternative Frequent Use Installation Kit.

The Frequent Use Installation Kit is available to buy from our online store. Simply add it to your order from the store. The kits can also be ordered at a later date.

