

LEXUS RX - 2016-2023

OUR REF: H0645

PACKAGING REQUIREMENTS.

CARGO LINER

- **2x 250 mm** 20mm wide self-adhesive loop fastener
- **16x tabs** self-adhesive loop fastener
- 35 x REF:113



REF:113

LIFTGATE COVER

- **9 x tabs** self-adhesive loop fastener
- 8 x REF:113



Rear split liner prepared for a bumper flap.



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener sticks to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and detailing.

To do this please:

1. Use a silicone remover, such as AutoGlym Intensive Tar Remover and apply generously to the surface you want to adhere to.
2. Using a **separate** clean & dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 to 2 if it doesn't stick)
3. Attach the fasteners and let them fully adhere over the next 24 hours for the best bond.



**The fasteners cannot be used once they have been in contact with silicone. Replacement kits are available from on website.*

STEP 1. PREPARATIONS

- Remove the Cargo cover. It may be replaced later.
- Please recline your rear seat
- Remove dog barrier / plastic tray. (Image A)



REF: I 13 TABS -FREQUENT USE KIT

- If you frequently remove/install your Cargo liner from/to your vehicle, please note that the carpet will “fluff” up. We have included a Frequent Use Installation Kit.
- As you install the Cargo liner, establish where the liner’s hook fasteners have been designed to attach to the carpet. Attach 113 tabs to the carpet first, and then the liner’s fasteners attach to these.
- **PLEASE NOTE;** To remove the liner, peel it away from the 113 tabs leaving them in place. This will reduce the carpet from fluffing up.



STEP 2. INSTALLING THE BASE

- Place the Cargo liner into the cargo area with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. The hook fasteners on the back attach directly to the carpet. (Image B)
- **D-Ring Access.** Ensure the bound slots are positioned accurately to correspond with the fixing aperture (Image C)



STEP 3A. INSTALLING THE SIDES

- Position the very front of the side snugly into position. The hook fasteners on the back of the liner attach directly to the carpet. Indicated blue in photos. (Image D)
- Attach the 250mm long loop fastener strips to the narrow plastic section, in preparation for the front panel later. Indicated green in the photos. (Image E + F)
- Position the rest of the side snugly into position. (Image F)
- Repeat on opposite side.



IMAGE D



IMAGE E



IMAGE F

STEP 3B. INSTALLING THE BACK

- Attach self-adhesive loop fastener tabs onto the chrome and plastic panel on either side of the liftgate lock, in line with the hookfasteners welded onto the cargo liner. (image G)
- Fasten the cargo liner to these.



IMAGE G

NON-HYBRID VEHICLES ONLY

Attach the two small separate covers directly to the carpet left exposed. (image H)

PLEASE NOTE

Hybrid vehicles have vents here : Do NOT cover them.




IMAGE H

STEP 4. INSTALLING THE FRONT

- Put the rear seats upright.
- Starting with the middle headrest, loop the hook & loop fastener straps around both headrest posts. (Image I). Make sure to hold the front part of the base in position to avoid pulling the Hatchbag too far up. Repeat the procedure with the left and right headrests.
- Attach the two outer wings to the fasteners you attached in step 3 (Image E + J).

PLEASE NOTE

You MUST unfasten the hook & loop fastener and the headrest straps before you recline the upper parts of the rear seats in future.

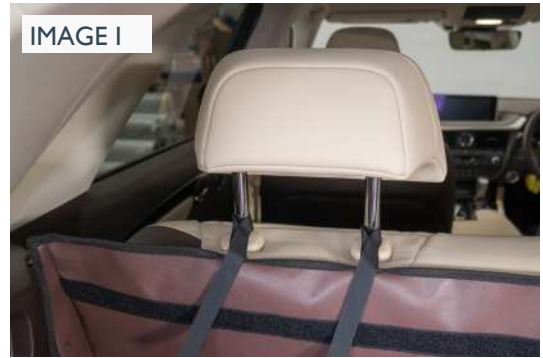

STEP 5. DOG BARRIER

- Put your dog barrier in place if applicable.

PLEASE NOTE

- *We do not advise you to use our Cargo liner with a cargo tray because it can drag the sides of the Cargo liner down.*



OPTIONAL EXTRAS

Please note: the following photos are not specific to your vehicle

The Bumper Flap and the Cargo Liner Extension cannot be added at a later date.

STEP 6A. LIFTGATE COVER (Image 1)

- Line up the liftgate cover with the liftgate and clean only the areas where the self-adhesive fastener tabs will be stuck to the plastic.
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.
- The remaining fasteners will attach directly to the carpet.



STEP 6B. BUMPER FLAP

- Install Cargo liner
- Attach the Bumper Flap to the loop fastener strip that has been manufactured into the base of the Cargo liner. (Image 2)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.



STEP 6C. CARGO LINER EXTENSION

The Cargo Liner Extension provides superior protection to the rear seats when purchased with a REAR PLUS option. (Image 3)

- The Cargo Liner Extension is designed to attach to a Rear Plus version liner.
- It provides additional protection to the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors.

