

## JEEP CHEROKEE - 2014 - 2019

OUR REF: H0700

### PACKAGING REQUIREMENTS.

#### CARGO LINER

- **1x 680 mm** 30mm wide self-adhesive loop fastener
- **1x 505 mm** 30mm wide self-adhesive loop fastener
- **1x 450 mm** 30mm wide self-adhesive loop fastener
- **19x tabs** self-adhesive loop fastener



Split cargo liner prepared for an additional bumper-flap

#### LIFTGATE COVER

- **22 x tabs** self-adhesive loop fastener



### VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and detailing.

#### To do this please:

1. Use a silicone remover, such as 'Auto-Glym Intensive Tar Remover' and apply generously to the surface you want to adhere to.
2. Using a separate clean & dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 to 2 if necessary) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

*\*The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available from our website.*



## STEP 1. PREPARATIONS

- Remove the cargo cover. It may be replaced later.
- Remove the nearside metal divider. (Image A) It may be replaced later
- Slide the 2nd row seat bench as far back towards the liftgate as possible.
- This cargo liner will accommodate any seat rake position once installed




## STEP 2. INSTALLING THE BASE

- Place the cargo liner into the cargo area with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. The hook fasteners welded to the back attach directly to the carpet. (Image B)



## STEP 3. INSTALLING THE BASE


- Fold the 2nd row seats forward to allow easier access for the next steps.
- Stick 9 self-adhesive fastener tabs on each side at the liftgate end of the cargo area in line with the hook fastener tabs welded onto the cargo liner. (Image C & D)

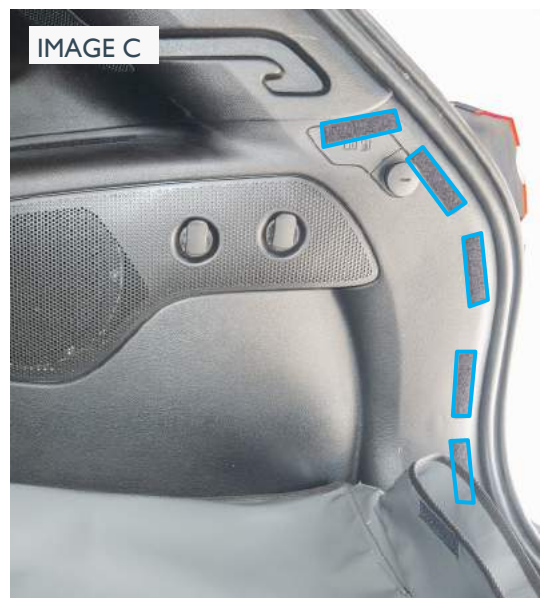

## STEP 4. INSTALLING THE SIDES

### LEFT

- Attach the 450mm long self-adhesive fastener (highlighted blue) along the arch on the nearside of the cargo area, in line with the fastener on the cargo liner. (Image E)
- Attach the 505mm long self-adhesive fastener (highlighted yellow) along the bottom edge of the crease in the panel. Snip the fastener strip to ease it around the bends. (Image F)
- Attach 1 self adhesive fastener tab (highlighted green) behind the bracket mount shown in Image G.

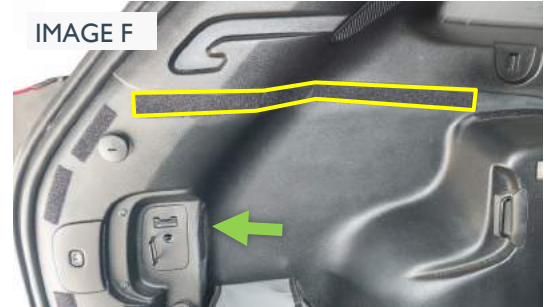

### RIGHT

- Attach the 680mm long self-adhesive fastener (highlighted blue) along the arch of the cargo area, in line with the fastener on the cargo liner. (Image H)
- Attach the liner to all the fasteners. (Image I & J) Start from the rear lining up the hook through the hole and work your way to the front. (orange arrows)
- You can now replace the Metal luggage divider bar (see gallery next page)



## STEP 4. INSTALLING THE FRONT

- Raise the Seats back into a upright position. Chose your desired seat rake.
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (Image K). Make sure to hold the front part of the base in position to avoid pulling the cargo liner too far up. Repeat the procedure with the left and right headrests.



## OPTIONAL EXTRAS

Please note: the following photos are not specific to your vehicle.

### STEP 5A. HEADREST COVER

- The Headrest cover is designed to protect the top of your rear seat giving additional protection from drooling dogs etc. (Image 1)
- Lower the headrests.
- Attach the Headrest cover to the loop fastener strip on the Cargo liner just below the top of the rear seats. (Image 2)
- The additional rectangle shaped covers offer protection should you fold the seats (Image 3)



### STEP 5B. LIFTGATE COVER

- Line up the Liftgate Cover with the liftgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (Image 4)
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



### STEP 5C. BUMPER FLAP

- Install the Cargo liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the Cargo liner. (Image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.



## OPTIONAL EXTRAS page 2

*Please note the following photos are non-specific to your vehicle*

### STEP 5D. CRAGO LINER EXTENSION

The Cargo Liner Extension offers superior protection to the rear seats when purchased with a REAR PLUS option.( Image 6)

- The cargo liner extension is designed to attach to a Rear Plus version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- The max width is 148cm (see photo on left).
- It does not offer full protection to the rear doors.



*The Seat Flap 5A, The Bumper Flap 5C & The Cargo Liner Extension 5D cannot be added at a late date*