

Land Rover Defender 110 (5 Seater) - 2020-present

our ref: H0801-SE5

INSTALLATION KIT CONTENTS

CARGO LINER

- 1 x 820 mm 50mm wide self-adhesive loop fastener
- 2 x 310 mm 30mm wide self-adhesive loop fastener
- 2 x 190 mm 30mm wide self-adhesive loop fastener
- 11 x tabs self-adhesive loop fastener

LIFTGATE COVER

- 18 x tabs self-adhesive loop fastener



Rear Plus with Seat Split cargo liner prepped for a cargo liner extension and bumper flap, with D-Ring option.



VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and detailing.

To do this please:

1. Use a silicone remover, such as AutoGlym Intensive Tar Remover, and apply generously to the surface you want to adhere to.
2. Using a separate clean, dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

**The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.*



Please note: not all of the photographs are specific to your vehicle

STEP 1. PREPARATIONS

- Remove the cargo cover. It may be replaced later.

STEP 2. INSTALLING THE BASE

- Fold the rear seats flat prior to placing the cargo liner into the cargo area.
- Place the cargo liner in the cargo area with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges.
- Push the two foam-filled tabs sewn onto the front end of the base into the slot between the base and the rear seats. Lifting the seats a little may open up the gap. Be sure to keep the base straight. Fold the seats back up trapping the foam tabs. (Image A)
- Stick the 1 x 820 mm 50mm wide self-adhesive loop fastener onto the liftgate end of the cargo area. Attach the hook fastener strip sewn on the underside of the cargo liner base to the loop fastener fixed in place previously. (Image B)



STEP 3. INSTALLING THE FRONT

- **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panels and the seat panel. (Image C)
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (Image D). Make sure to hold the front part of the base in position to avoid pulling the cargo liner too far up. Repeat the procedure with the left and right headrests.



REAR PLUS VERSIONS

You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (Please refer to **REAR PLUS / SPLIT** options on website to see detailed photo.)



STEP 4. INSTALLING THE SIDES

- On both sides of the cargo area sides stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the cargo liner as highlighted on **Image E & F**.
 - Green **310mm 30mm loop fastener**
 - Yellow **190mm 30mm loop fastener**
 - Blue **loop fastener tabs**
- If necessary snip the self-adhesive fastener strips at the corners to ease around the curves.
- Fasten the hook fastener sewn onto the top and back edge on both sides of the cargo liner directly onto the previously attached loop fasteners. (**Image G & H**)

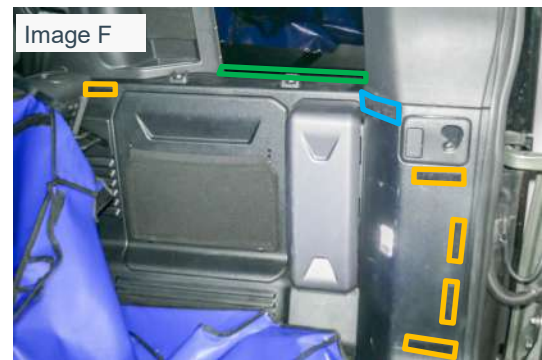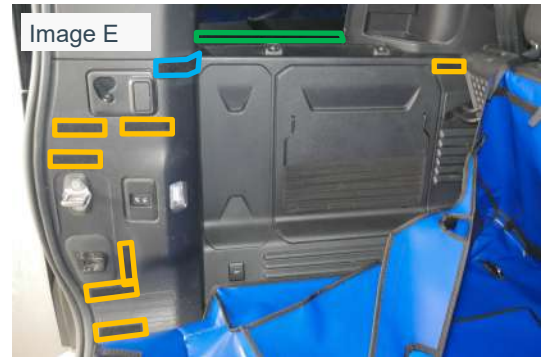


OPTIONAL EXTRAS

Please note: the following photos are not specific to your vehicle.

STEP 5A. HEADREST COVER

- The Headrest cover is designed to protect the top of your rear seat giving additional protection from drooling dogs etc. ([Image 1](#))
- Lower the headrests.
- Attach the Headrest cover to the loop fastener strip on the cargo liner just below the top of the rear seats. ([Image 2](#))
- The additional rectangle shaped sections offer protection should you fold the seats ([Image 3](#))

STEP 5B. LIFTGATE COVER

 Line up the liftgate cover with the liftgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. ([Image 4](#))

- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.

STEP 5C. BUMPER FLAP

- Install the cargo liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the cargo liner. ([Image 5](#))
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.



OPTIONAL EXTRAS PAGE 2

Please note: the following photos are not specific to your vehicle.

STEP 5D. CARGO LINER EXTENSION

The Cargo liner extension provides superior protection for the rear seats when purchased with a REAR PLUS option.

- The Cargo liner extension is designed to attach to a Rear Plus/Split version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors
- Attach the cargo liner extension to the main cargo liner (Image 6)
- Fasten the two ties in the corner together (Orange arrows - Image 7)
- Fasten the hook & loop fastener straps around the headrest posts. (Blue arrows - Image 7)
- Fasten ties to the corresponding rear seat striker loop (Green arrow - Image 8)
- Repeat on opposite side

Please Note: The Headrest Cover 5A, the Bumper Flap 5C & the Cargo Liner Extension 5D cannot be added at a later date.

