

Installation Instructions

hatchbag.us

BMW X5 - 2019 - present

Our ref: H0849

INSTALLATION KIT CONTENTS:

CARGO LINER

- 2 x 435 mm 20mm wide self-adhesive loop fastener
- 2 x 150 mm 50mm wide self-adhesive loop fastener
- 8 x tabs self-adhesive loop fastener
 - LIFTGATE COVER
- 18 x tabs self-adhesive loop fastener
- DROP DOWN LIFTGATE COVER
- 1 x 1050 mm 30mm wide self-adhesive loop fastener
- 1 x 1010 mm 30mm wide self-adhesive loop fastener
- 6 x tabs self-adhesive loop fastener



Rear Plus with Seat Split cargo liner prepped for a cargo liner extension and bumper flap.

VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you MUST CLEAN all grime from the plastic and REMOVE all SILICONE applied during manufacture and valeting.

To do this please:

- Use a silicone remover, such as AutoGlym Intensive Tar Remover, 1. and apply generously to the surface you want to adhere to.
- Using a separate clean, dry cloth, thoroughly dry the surface until 2. the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
- 3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

*The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.





STEP 1. PREPARATIONS

- Remove the load cover. It may be replaced later.
- Fold the rear seats flat (Image A)
- On both sides, attach 1 x self-adhesive loop fastener tab by the rear seat backrests, as shown in Image B



凵



STEP 2. INSTALLING BASE

- Place the cargo liner in the cargo area with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges.
- Lift the liftgate flap and place it in the pocket sewn into the cargo liner base (Image C)
- Push the two foam-filled tabs sewn onto the front end of the base into the slot between the base and the rear seats. Lifting the seats a little may open up the gap. Be sure to keep the base straight. (Image D)
- Fold the seats back up trapping the foam tabs (Image E)







STEP 3. INSTALLING THE FRONT

- Put the headrests in their highest position. (Image F)
- PLUS / SPLIT VERSION ONLY Fasten the hook & loop fasteners between the side panels and the seat panel. (Image G)
- For the middle headrest, loop the elastic fastener strap around both headrest posts. For the left and right headrest fasten the hook & loop fastener straps around both headrest posts. (Image H). Make sure to hold the front part of the base in position to avoid pulling the cargo liner too far up. Repeat the procedure with the left and right headrests.

REAR PLUS VERSIONS

You MUST unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (*Please refer to REAR PLUS / SPLIT options on website to see detailed photo.*)








STEP 4. INSTALLING THE SIDES


- On both sides of the boot stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the cargo liner as highlighted on Image I.
 - Green 435 mm loop fastener
 - Orange 150 mm loop fastener
 - Yellow loop fastener tabs
- At the rear seat end, fasten the single hook fastener to the previously attached tab from step 1. Tilt the rear seat backs slightly for more space if necessary. Repeat on the opposite side. (Image J)

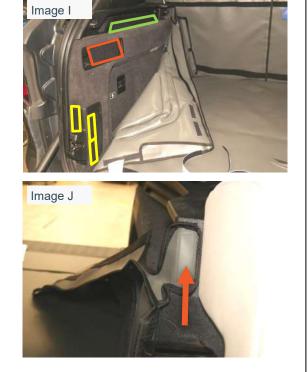

STEP 4. INSTALLING THE SIDES

(CONTINUED)

• Fasten the hook fastener sewn and welded onto the top and back edge on both sides of the cargo liner directly onto the previously attached loop fasteners. (Image K & L)

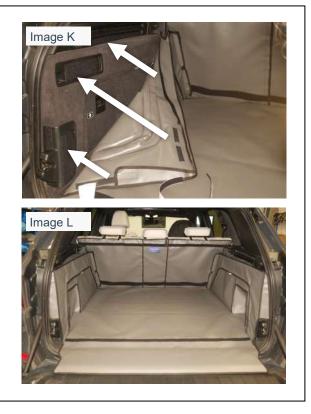

OPTIONAL EXTRAS

Please note: not all of the photographs are specific to your vehicle.

STEP 6B. LIFTGATE COVER (INC DROP DOWN LIFTGATE COVER)

- Line up the liftgate cover (Image 1) and drop down liftgate cover (Image 2) with the liftgate and clean the areas where the self-adhesive loop fastener tabs will be stuck.
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic / metal trim.

STEP 6C. BUMPER FLAP

- Fit the cargo liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the cargo liner. (Image 3)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.



Â

OPTIONAL EXTRAS PAGE 2

Please note: not all of the photographs are specific to your vehicle.

STEP 6D. CARGO LINER EXTENSION

The Cargo liner extension provides superior protection for the rear seats when purchased with a REAR PLUS option.

- The Cargo liner extension is designed to attach to a Rear Plus/Split version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors
- Attach the Cargo liner extension to the main cargo liner (Image 4)
- Fasten the two ties in the corner together (Orange arrows Image 5)
- Fasten the hook & loop fastener straps around the headrest posts. (Blue arrows Image 5)
- Fasten ties to the corresponding rear seat striker loop (Green arrow Image 6)
- Repeat on opposite side

Please Note: the Seat Flap, the Bumper Flap & the Cargo liner Extension cannot be added at a later date.





