Audi Q5-SQ5-not-Sportback

US H0988

2025 - present

Installation Kit Contents

- [ ] Cargo liner
  - 2 x 440 / 30
- [ ] Liftgate Cover
  - 22 x tabs

"quantity x length / width" in mm



*Please be aware that your cargo liner may be different depending on your options/extras selection

Before you install the cargo liner

To ensure the self-adhesive fasteners securely adhere, it's ***absolutely essential*** to thoroughly ***eliminate*** any ***silicone*** residues left from manufacturing and detailing processes.

To achieve this you will need a silicone remover. We recommend ***Autoglym® Intensive Tar Remover***

Preparations

-Ensure your cargo area floor and seats are set to match your order.

-Remove the cargo cover. It may be replaced later.

-Slide the seats as far back to the liftgate as possible, if applicable.

1

Installation key



Where you find this symbol the cargo liner's hook fastener will attach directly to the carpet [1]

When this is not suitable, we provide self-adhesive loop fasteners to stick onto plastic/metal trim:



Where you find this symbol, follow these steps:

1) Apply *Autoglym® Intenisve Tar remover* generously to a cloth and scrub the highlighted surface areas.

2) Dry surface thoroughly with a separate cloth until it drags.

3) Test the surface by attaching one fastener tab - it should stick well, if not repeat previous steps[2]



Silicone is used during car manufacturing/detailing, it will interfere with the adhesion.

Tips:

- [1] If you frequently remove your cargo liner from your vehicle consider our ***Frequent Use Installation Kit*** to prevent carpet fluffing, available for purchase from our "Accessories" page.
- [2] If temperatures are low, run your car for a little bit so that the cargo area reaches room temperature or install your liner once you have been out for a drive.
- For optimal adhesion of the fasteners, do not remove the cargo liner for approx. 48 hours.

Notes:

- The adhesive fasteners ***cannot be used once they have been in contact with silicone.*** Replacement Installation Kits can be purchased from our accessories page.
- Adherence to the instructions will affect the performance of the Installation Kit. Please note *The Hatchbag Company* will not accept requests for free replacements if the adhesives come loose after use.

Refer to colour code in the first page Installation Kit Contents

2




-Ensure the base is aligned to fit the cargo area edges.

-Fasten the front panel to the seat back without pulling the base off the floor.

If you want to fold the rear seats later, you MUST unfasten the front panel first!


3

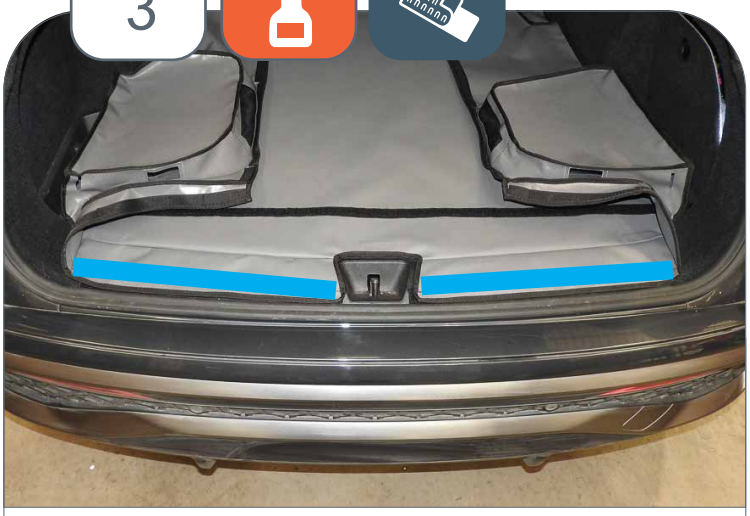

Tips:

- Snip the self adhesives to ease around the curves

4

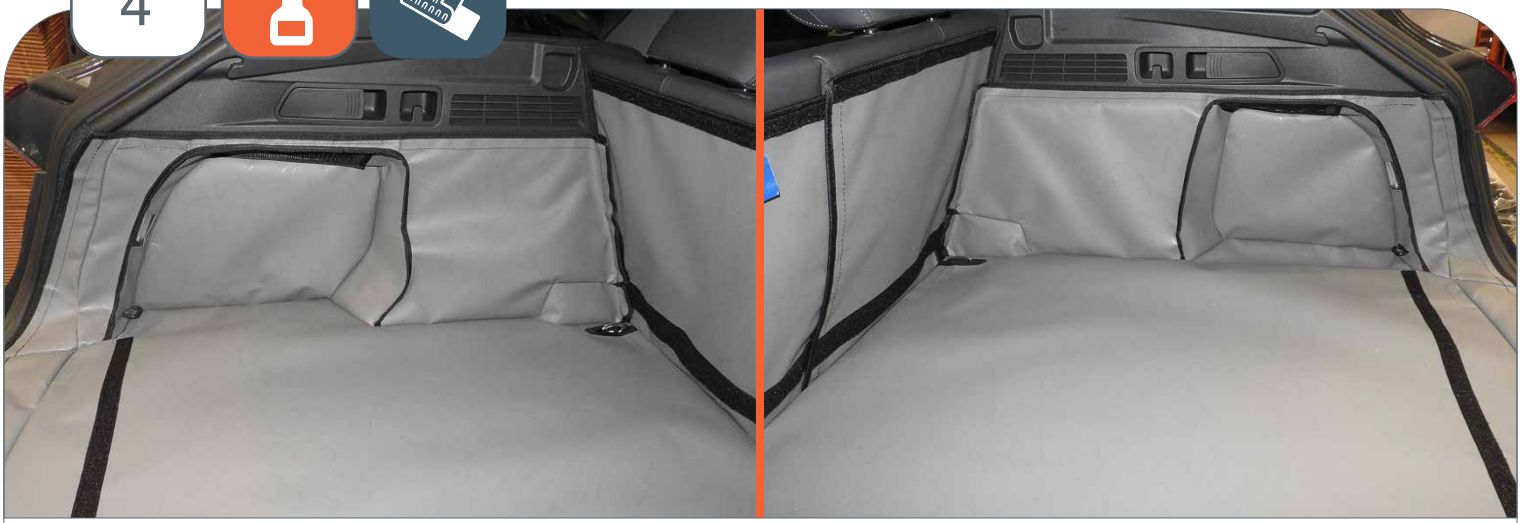

*Please be aware that your cargo liner may be different depending on your options/extras selection

Tips:

- Commence installing from the liftgate end.
- For Rear Plus versions, fasten the side to the front panel from bottom to top

Optional extras

Note: not all the photos are specific to your vehicle

Bumper Flap

-Attach the Bumper Flap to the loop fastener strip located on the base of the cargo liner.





Headrest Cover

-Lower the headrests.

-Attach the Seat Flap to the loop fastener strip located just below the headrest straps.


-Use additional flaps when folding seats.

Liftgate Cover



-Line up the Liftgate Cover with the liftgate and clean the areas where the self-adhesive loop fastener tabs will be stuck.

-Begin with the central top and bottom fastener.

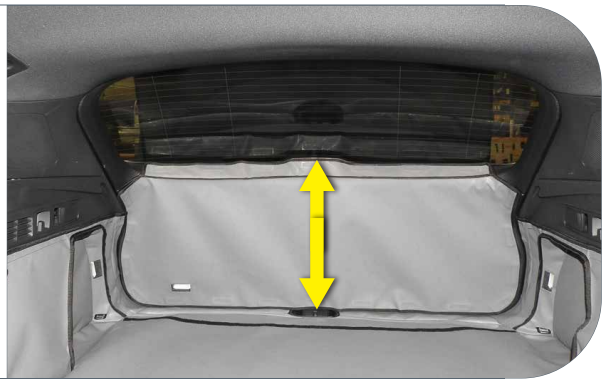



Cargo Liner Extension



1. Attach the cargo liner extension to the main cargo liner.
2. Fasten the hook & loop fastener straps around the headrest posts.
3. Fasten the two ties in the corner together.
4. Attach behind the side panel of the cargo liner.