

## Kia Niro EV (All-Electric) - 2022 - present

Our ref: H0853

### INSTALLATION KIT CONTENTS:

#### ☐ CARGO LINER

- **2 x 380 mm** 30mm wide self-adhesive loop fastener
- **1 x 490 mm** 30mm wide self-adhesive loop fastener
- **1 x 350 mm** 30mm wide self-adhesive loop fastener
- **FRSD:** **9 x tabs** self-adhesive loop fastener
- **FLOW:** **10 x tabs** self-adhesive loop fastener

#### ☐ LIFTGATE COVER

- **18 x tabs** self-adhesive loop fastener



Left: FRSD cargo liner prepped for a bumper flap

Right: FLOW cargo liner prepped for a head rest cover, cargo liner extension and bumper flap



### VERY IMPORTANT PREPARATION



To ensure the self-adhesive hook & loop fastener stick to the plastic trim, you **MUST CLEAN** all grime from the plastic and **REMOVE** all **SILICONE** applied during manufacture and valeting.

To do this please:


1. Use a silicone remover, such as AutoGlym Intensive Tar Remover, and apply generously to the surface you want to adhere to.
2. Using a separate clean, dry cloth, thoroughly dry the surface until the cloth starts to drag. Attach one self-adhesive fastener tab to see if it sticks. (Repeat steps 1 and 2 if necessary.) Extra tabs have been provided.
3. Attach the self-adhesive fasteners and let them fully adhere over the next 24 hours for the best bond.

*\*The self-adhesive fasteners cannot be used once they have been in contact with silicone. Replacement kits are available on our website.*



## STEP 1. PREPARATIONS

- Remove the load cover. It may be replaced later.
- Set the floor level to fit the specification of your order.
- Put the headrests in their highest position. (Image A)

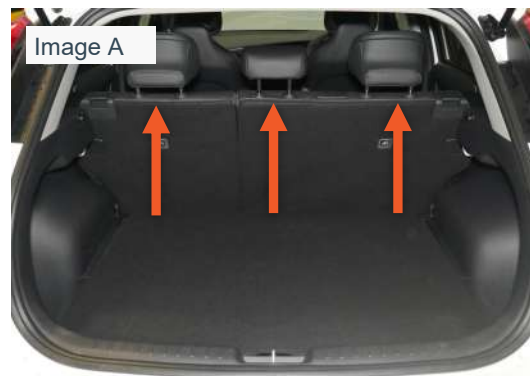

## STEP 2. FITTING THE BASE

- Place the cargo liner into the car with the Hatchbag logo at the seat end. Flatten the base so it fits snugly against the edges. The hook fasteners on the underside attach directly to the carpet. (Image B)



## STEP 3. FITTING THE FRONT

- **PLUS / SPLIT VERSION ONLY** - Fasten the hook & loop fasteners between the side panels and the seat panel. (Image C)
- Starting with the middle headrest, fasten the hook & loop fastener straps around both headrest posts. (Image D). Make sure to hold the front part of the base in position to avoid pulling the cargo liner too far up. Repeat the procedure with the left and right headrests.



## REAR PLUS VERSIONS

You **MUST** unfasten the hook & loop fasteners and the headrest straps before you recline the upper part of the rear seats. (Please refer to **REAR PLUS / SPLIT** options on website to see detailed photo.)

## STEP 4. FITTING THE SIDES

- On the right hand side of the cargo area stick the following loop fasteners in line with the hook fasteners sewn & welded on the reverse side of the cargo liner as highlighted on **Image E RHS**.




- Green 1 x 490 mm loop fastener

- Repeat on the left hand side: (**Image F LHS**)

- Pink 1 x 350 mm loop fastener

- Yellow 1 x tab loop fastener

- Fasten the hook fastener sewn onto the top and back edge on both sides of the cargo liner directly onto the previously attached loop fasteners. (**Image G**)

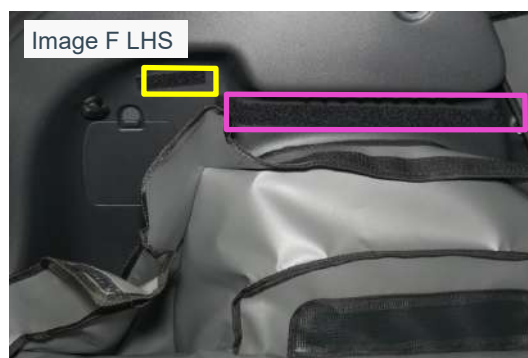

## STEP 5. FITTING THE BACK



- Stick the 2 x 380mm 30mm wide self-adhesive loop fasteners to the liftgate edge of the cargo area starting from the lock in the middle and running along the plastic panel (**orange, Image H**).
- FLOW ONLY - Stick 1 self-adhesive fastener tab to the inside center of the back panel, aligned with the hook fastener on the back panel of the cargo liner (**white arrow, Image H**)
- Stick 8x tabs self-adhesive loop fasteners to the plastic panel located at the liftgate end of the side of the cargo area, aligned with the hook fastener on the back of the cargo liner. (**yellow, Image H**)
- Fasten the hook fastener sewn onto the side and back edge on both sides of the cargo liner directly onto the previously attached loop fasteners.





## OPTIONAL EXTRAS


Please note: not all of the photographs are specific to your vehicle.

### STEP 6A. HEAD REST COVER

- The head rest cover is designed to protect the top of your rear seat giving additional protection from drooling dogs etc. (Image 1)
- Lower the headrests
- Attach the head rest cover to the loop fastener strip on the cargo liner just below the top of the rear seats. (Image 2)
- The rectangle shaped section is designed **only** to be used in conjunction with the **Rear Plus/Split**. With the rear seats in the folded position this flap extends the coverage over the exposed section of the seat backs and the headrests. (Image 3)




### STEP 6B. LIFTGATE COVER

-  Line up the liftgate cover with the liftgate and clean the areas where the self-adhesive loop fastener tabs will be stuck. (Image 4)
- Use the self-adhesive loop fastener tabs to attach the cover to the plastic trim.



### STEP 6C. BUMPER FLAP

- Fit the cargo liner
- Attach the Bumper Flap to the loop fastener strip located at the base of the cargo liner. (Image 5)
- The Bumper Flap either folds into the vehicle OR can be detached and stored elsewhere when you close the liftgate.

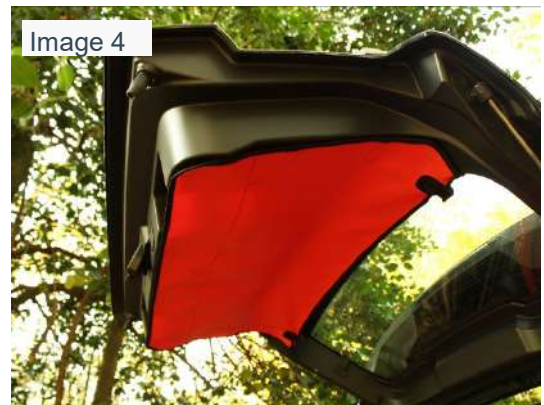

## OPTIONAL EXTRAS PAGE 2

Please note: not all of the photographs are specific to your vehicle.

### STEP 6D. CARGO LINER EXTENSION

The Cargo liner extension provides superior protection for the rear seats when purchased with a REAR PLUS option.

- The cargo liner extension is designed to attach to a Rear Plus/Split version liner.
- It provides additional protection for the back of the front seats and the extended floor area when the rear seats are folded flat.
- It does not offer full protection to the rear doors
- Attach the cargo liner extension to the main cargo liner (Image 6)
- Fasten the two ties in the corner together (Orange arrows - Image 7)
- Fasten the hook & loop fastener straps around the headrest posts. (Blue arrows - Image 7)
- Fasten ties to the corresponding rear seat striker loop (Green arrow - Image 8)
- Repeat on opposite side



**Please Note: the Seat Flap, the Bumper Flap & the Cargo liner Extension cannot be added at a later date.**